


125KHz RFID Reader

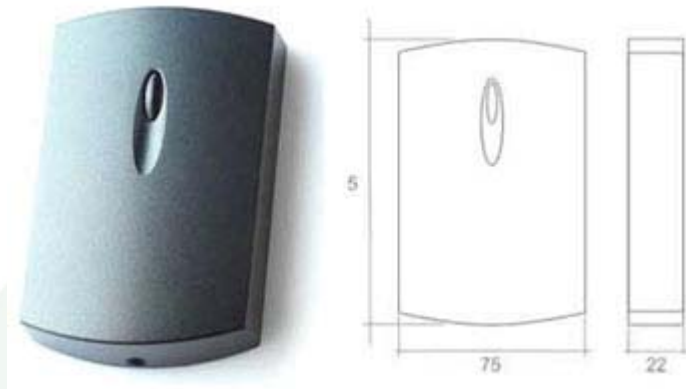

SPECIFICATIONS:

Working frequency	125KHz
Working with maps	EM4001,Hitag-1,Hitag-2,Hitag-s
Reading range	4-10 cm
Power supply	8 - 18 V DC
Consumption of current	135mA (max)
Audio / light indication	zumera signal, two-LED
Operating Temperature	-30° C to +40 °C
Body material	ABS plastic
The output interfaces	RS-232, RS485, Wiegand 26
Size (mm)	115 * 75 * 22